




華光電線電纜股份有限公司

HILIGHT ELECTRIC WIRE&CABLE CO.,LTD.

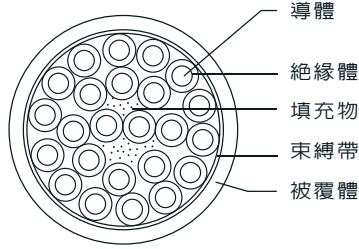

600V PVC 控制電纜 (PP帶填充型 : CVV)

6芯 -19芯

CNS 4898 , JIS C 3401

芯 線 數	導 體			絕緣體 厚 度	被 覆 體 厚 度	完 成 外 徑 (約)	導 體 電 阻 (20℃)	試 驗 電 壓 (A.C.)	絕 緣 電 阻 (20℃)	參 考		
	公稱截面積 mm ² 或直徑	構成 單線數/ 單線徑	外 徑							概 算 重 量	標 準 長 度	標 準 包 裝 法
	mm	mm	mm	mm	mm	mm	Ω/km	V/1min	MΩ-km	Kg/km	m	
6	1.25	7/0.45	1.35	0.8	1.5	12.5	16.8	2000	50	200	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	14.0	9.42	2000	50	280	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	15.5	5.30	2000	50	400	300	捲筒
	5.5	7/1.0	3.0	1.0	1.5	18.5	3.40	2000	50	580	300	捲筒
	8.0	7/1.2	3.6	1.2	1.5	22	2.36	2000	50	810	300	捲筒
	14	7/1.6	4.8	1.4	1.7	27	1.33	2000	40	1330	300	捲筒
7	1.25	7/0.45	1.35	0.8	1.5	12.5	16.8	2000	50	220	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	14.0	9.42	2000	50	300	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	15.5	5.30	2000	50	430	300	捲筒
	5.5	7/1.0	3.0	1.0	1.5	18.5	3.40	2000	50	640	300	捲筒
	8.0	7/1.2	3.6	1.2	1.5	22	2.36	2000	50	900	300	捲筒
8	1.25	7/0.45	1.35	0.8	1.5	13.5	16.8	2000	50	250	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	15.0	9.42	2000	50	340	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	17.0	5.30	2000	50	500	300	捲筒
	5.5	7/1.0	3.0	1.0	1.5	21	3.40	2000	50	730	300	捲筒
	8.0	7/1.2	3.6	1.2	1.6	24	2.36	2000	50	1040	300	捲筒
9	1.25	7/0.45	1.35	0.8	1.5	14.5	16.8	2000	50	270	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	16.0	9.42	2000	50	380	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	18.0	5.30	2000	50	560	300	捲筒
	5.5	7/1.0	3.0	1.0	1.5	22	3.40	2000	50	830	300	捲筒
	8.0	7/1.2	3.6	1.2	1.7	26	2.36	2000	50	1190	300	捲筒
10	1.25	7/0.45	1.35	0.8	1.5	15.5	16.8	2000	50	310	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	17.5	9.42	2000	50	430	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	19.5	5.30	2000	50	630	300	捲筒
	5.5	7/1.0	3.0	1.0	1.6	24	3.40	2000	50	940	300	捲筒
	8.0	7/1.2	3.6	1.2	1.8	29	2.36	2000	50	1360	300	捲筒
12	1.25	7/0.45	1.35	0.8	1.5	16.0	16.8	2000	50	350	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	18.0	9.42	2000	50	490	300	捲筒
	3.5	7/0.8	2.4	0.8	1.5	21	5.30	2000	50	720	300	捲筒
	5.5	7/1.0	3.0	1.0	1.7	25	3.40	2000	50	1100	300	捲筒
	8.0	7/1.2	3.6	1.2	1.8	30	2.36	2000	50	1560	300	捲筒
16	1.25	7/0.45	1.35	0.8	1.5	17.5	16.8	2000	50	430	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	19.5	9.42	2000	50	615	300	捲筒
	3.5	7/0.8	2.4	0.8	1.6	23	5.30	2000	50	925	300	捲筒
	5.5	7/1.0	3.0	1.0	1.8	28	3.40	2000	50	1410	300	捲筒
19	1.25	7/0.45	1.35	0.8	1.5	18.5	16.8	2000	50	495	300	捲筒
	2.0	7/0.6	1.8	0.8	1.5	21	9.42	2000	50	705	300	捲筒
	3.5	7/0.8	2.4	0.8	1.6	24	5.30	2000	50	1070	300	捲筒
	5.5	7/1.0	3.0	1.0	1.8	30	3.40	2000	50	1630	300	捲筒